


Date:	
Type:	
Firm Name:	
Project:	



Blaze Strip


Everylite Datasheet Ver 3.0

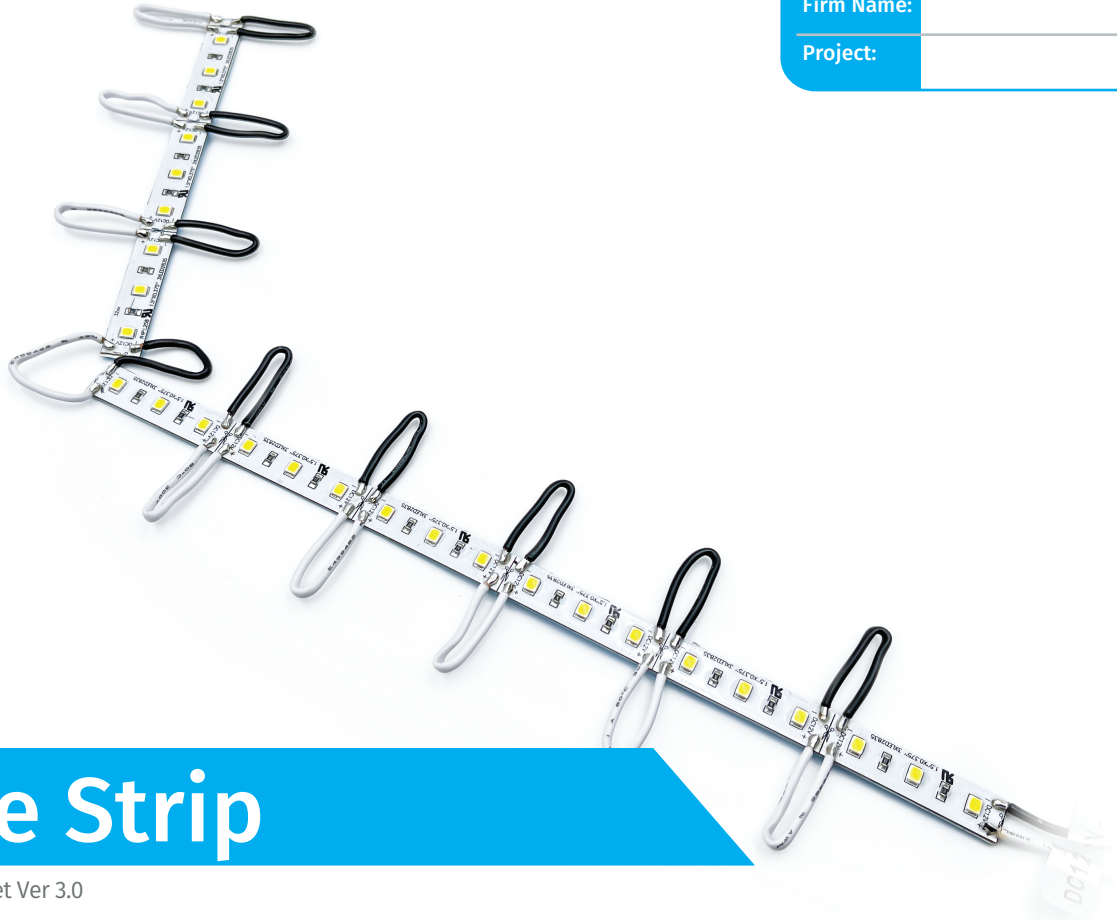

Features

- Segmented and foldable for easy customization
- Min. cutting length is 1.5"
- Available in 4000K-6500K White
- Used in architectural, sign letter, perimeter, and many other lighting applications


2835V12-SS60WX-BLZ

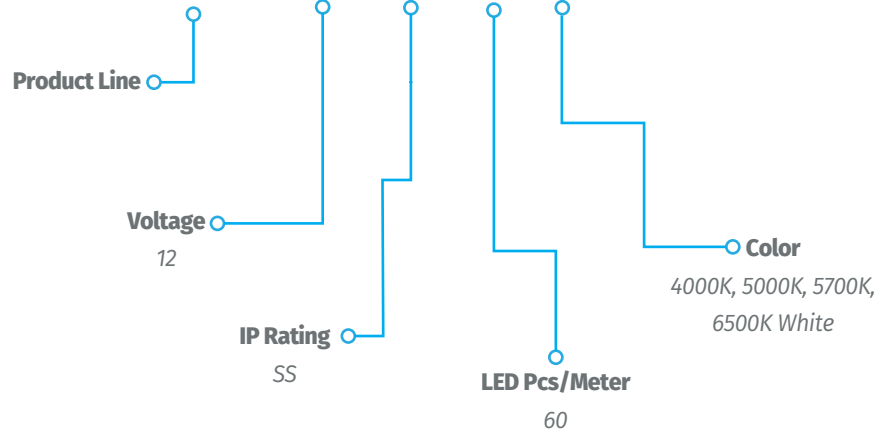

TBD Technical Parameters

Item #	LED Qty. (LED/m)	LED Qty (LED/ft)	Cutting Length	Max. Run Length	Strip Length	Viewing Angle	Input Voltage	Wattage (W/cut length)	Certifications	Working Temperature	IP Rating Availability
2835V12-SS60WX-BLZ	60	18	1.5"	60.2"	30.1"	120	12V	0.72		-13~140 °F	64

IP Rating

IP Rating	Order Code	Description
IP64	SS	 Spray Glue Coated

Available Colors

Color Temperature	Order Code	Lumen Output (lm/ft)
4500	W4	332.32
5000	W5	359.76
5700	W57	359.76
6500	W6	359.76

Notes

- ① Testing environment temperature: 25±2°C [77±3.6°F];
- ② The above data are typical values; the actual data of every single product could differ from the typical values. The data is subject to change without prior notice.
- ③ The above color temperature is the color temperature of the LED. The color temperature of actual products is subject to that of the sample.

Drawing

